


Hand Slide Valve (3/2way)



Characteristics

- ▲ There are several ways of internal and external thread connection, suitable for the application in different pipeline systems;
- ▲ The direction - change slides smoothly and has good hand feeling;
- ▲ There is large effective circulating area;
- ▲ The valve spool surface is treated with acid washing passivation, and the surface of valve body is oxidized to keep the color for a long time.

Symbol



Specification

型号 / Model	EHSV06	EHSV08	EHSV10	EHSV15	EHSV20
工作介质/Fluid	空气/ Air				
动作方式/Operating	手控直动式/Manual Direct Drive Type				
*接管螺纹/Port Thread	R1/8	R 1/4	R 3/8	R 1/2	R 3/4
有效截面积/Efficient Sectional Area mm ²	23 mm ²	40 mm ²	62 mm ²	140 mm ²	250 mm ²
位置数/Position	三位二通/3/2 way				
润滑/Lubricating	不需要/ Not Required				
允许耐压力/ Max Pressure MPa	1.5MPa(215psi)				
最高使用压力/ Operating Pressure MPa	1.0MPa(145psi)				
使用温度/ Operating Temperature	0 ~ 60				
安装型式/ Installation	标准型、双外牙型(SS)、双内牙型(FF)、外内牙型(SF) Standard、Double male thread(SS)、Double female thread(FF)、Male and female(SF)				


★ Port thread NPT、G for selection.

★ Female thread are Rc1/8、Rc1/4、Rc3/8、Rc1/2、Rc3/4 .

Product Code System

EHSV	06	-	SS	-	
型号/Model	接管螺纹/Port thread		安装型式/ Installation		牙型/Thread
	06 : R1/8 15 : R1/2		空白 : 标准型/ Standard		空白 : 内螺纹G牙型、外螺纹R型/ Female thread G、Male thread R
	08 : R1/4 20 : R3/4		SS : 双外牙型/ Double male thread		T:NPT牙型/NPTthread
	10 : R3/8		FF : 双内牙型/Double female thread		G:G牙型/Gthread
			SF : 外内牙型/Male and female thread		R:R牙型/R thread

Dimensions

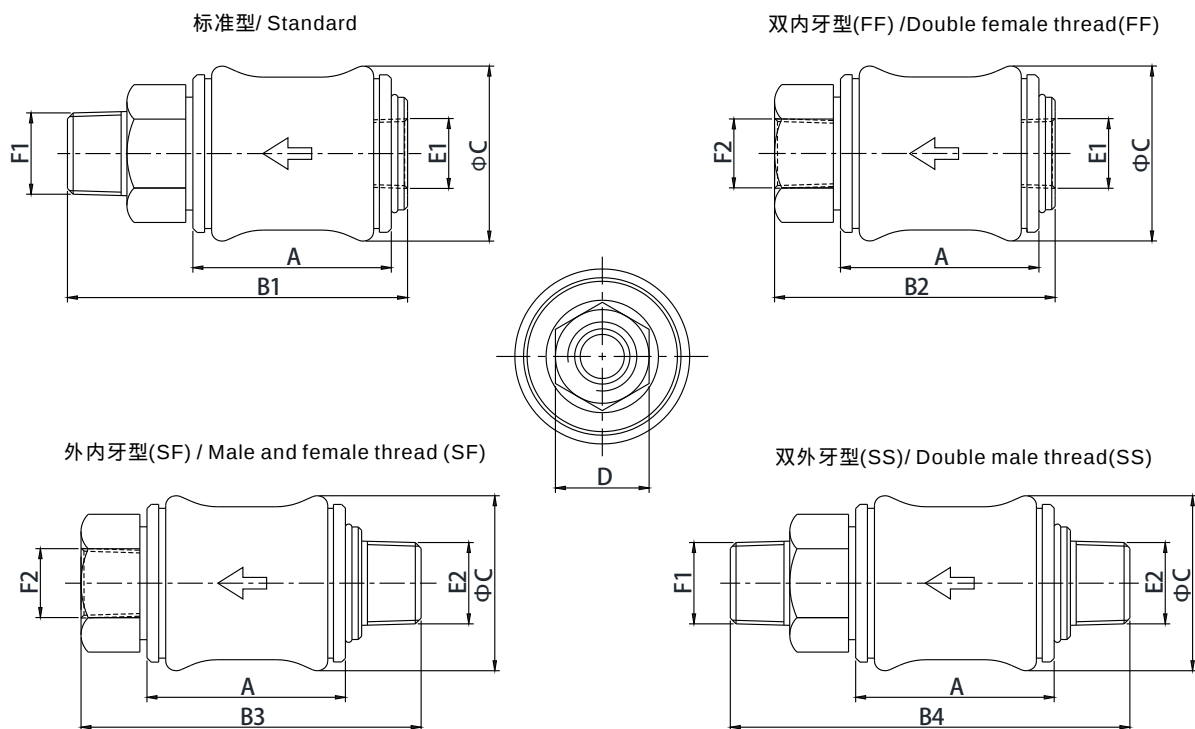

型号\符号 Model\Symbol	A	B1	B2	B3	B4	C	D	E1	E2	F1	F2
EHSV06	30	50	43	50	57	27.5	17	G1/8	R1/8	R1/8	G1/8
EHSV08	32.5	58	47	58	69	30	19	G1/4	R1/4	R1/4	G1/4
EHSV10	39	68.5	55.5	68.5	81.5	35.5	22	G3/8	R3/8	R3/8	G3/8
EHSV15	50	85.5	70.5	85.5	100.5	44	30	G1/2	R1/2	R1/2	G1/2
EHSV20	58	96.5	79.5	96.5	113.5	53.5	36	G3/4	R3/4	R3/4	G3/4