

A close-up photograph of the EASUN 42112-01 pressure washer. The device is a compact, rectangular unit with a light grey or off-white finish. It features two large, circular, threaded ports on the top surface, likely for water inlet and detergent injection. A small, circular pressure release valve is visible on the right side. The front face has a white label with the EASUN logo and the model number 42112-01. The unit is shown from a slightly elevated, front-three-quarter perspective.





4A 230系列
4A 230 series

▲欲订购接管螺纹为G1/8" 的双气控三位中间封闭型4A2系列气控阀, 其正确的订购代码为:
4A230C - 06





型号Model	4A210-06	4A220-06	4A230C-06	4A230E-06	4A230P-06	4A210-08	4A220-08	4A230C-08	4A230E-08	4A230P-08
工作介质/ Fluids	经过滤的压缩空气 / The constrigent after filtered									
动作方式 / Operation	外气控/ Exterior Control									
位置数 / Position	二位五通 5/2 Way		三位五通 5/3 Way			二位五通 5/2 Way		三位五通 5/3 Way		
有效截面积 / Efficient Sectional Area	14mm ² (CV=0.78)		12mm ² (CV=0.67)			16mm ² (CV=0.89)		12mm ² (CV=0.67)		
接管螺纹/ Port Thread	进气/ Supply=出气/ Export=排气/ Exhaust=G1/8"					进气/ Supply=出气/ Export=G1/4" 排气/ Exhaust=G1/8"				
润滑/ Lubrication	不需要/Not Required									
使用压力 / Operating Pressure	0.15~0.8MPa									
最大耐压力/ Max Pressure	1.2MPa									
工作温度 / Operating Temperature	-5~60℃									
最高动作频率/ Max Frequency	每秒五次/ 5 Times Per Second									
寿命/Life	2500万次/25 Million									

外形与安装尺寸

4A210-08(06)

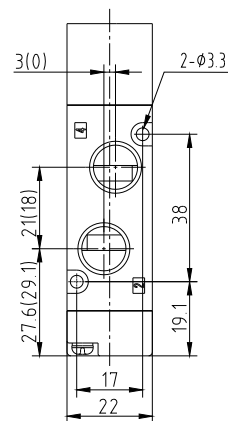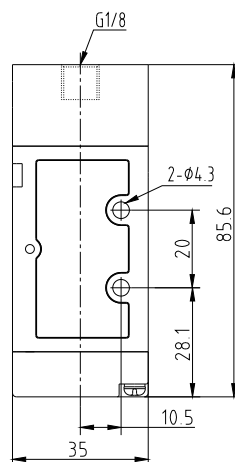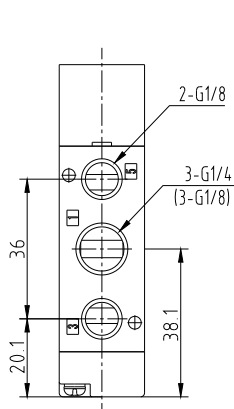

4A220-08(06)

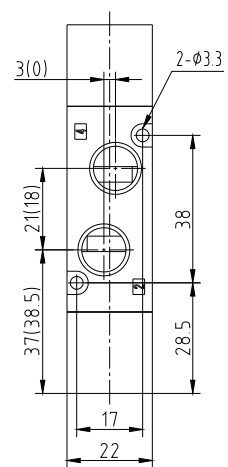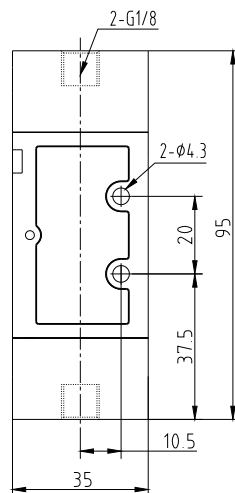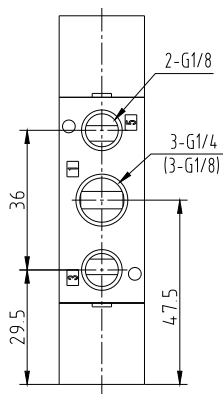

4A230-08(06)

